

**Storz C mit Kunststoff-Knaggenteilen**  
**Storz C with synthetic coupling heads**




**Schlauchkupplungen**

- Hochfester Kunststoff (max. PN 10)
- Stutzen aus Aluminium

**Hose Couplings**

- high performance plastic (max. PN 10)
- tails made of light alloy

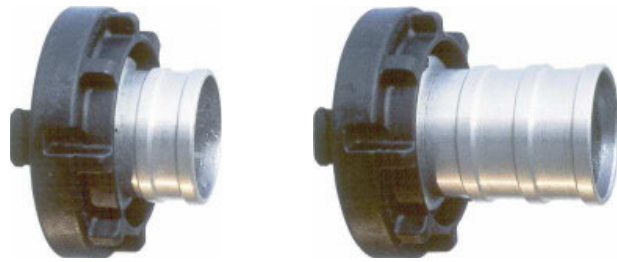

Storz Size	KA (mm) Lug	D (mm)	L (mm)	Weight (kg)	Bemerkung Remark	Ident-No.	Euro
52-C	66	19	90	0,23		12-066019-60	
		25	90	0,24		12-066025-60	
		32	90	0,24		12-066032-60	
		38	90	0,24		12-066038-60	
		40	90	0,25		12-066040-60	
		42	55	0,20	ähnl. DIN 14 332	11-066042-65	
		42	90	0,25		12-066042-60	
		45	90	0,24		12-066045-60	
		50	90	0,26		12-066050-60	
		52	55	0,20	ähnl. DIN 14 302	11-066052-65	
		52	90	0,24	ähnl. DIN 14 321	12-066052-60	
		55	90	0,26		12-066055-60	
		60	90	0,26		12-066060-60	

**Blindkupplungen**

- Hochfester Kunststoff (max. PN 10)
- Deckel aus Aluminium
- Kette Stahl verzinkt

**Blank Caps**

- high performance plastic (max. PN 10)
- stoppers made of light alloy
- chain steel galvanized



Storz Size	KA (mm) Lug	Ausstattung Equipment	Weight (kg)	Bemerkung Remark	Ident-No.	Euro
52-C	66	with chain	0,24	ähnl. DIN 14 311	31-066000-60	